
Performance



NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

Specifications

Flow Rate Adjustable to0-46 gpm (174.1 lpm) Port Size
Suction 1½" TRI-CLAMP
Discharge 1½" TRI-CLAMP
Air Inlet
Air Exhaust 1/2" NPT
Suction Lift
Dry
Wet
Max Solid Size (Diameter)
1/8" (3.2 mm)
Max Noise Level
Stainless Steel

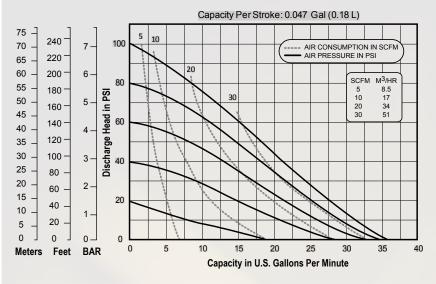

Dimensions

